

3 years warranty*

* with product registration



MADE IN GERMANY



DIGTA SONICMIC II CLASSIC THE CLEAR-CUT LINE

USB dictation microphone

elegantly shaped, slim and ergonomic

You select the dictation software and concentrate on your words whilst ignoring your PC. With the Digta SonicMic II Classic all recording and play-back functions are comfortably matching into the palm of your hand.

- Extra wide, comfortable slide switch for easy onehanded operation
- Tension of slide switch individually adjustable
- Ergonomic design with microphone stand
- Integrated sound card and dynamic speakers make for optimum recording and play-back quality
- DSSPro recording for best sound quality (with software DigtaSoft)
- All button functions are individually programmable with three functions (by means of the software)
- Dragon NaturallySpeaking control
- Easy integration into backoffice systems via open interfaces (SDK)
- DSSMover for automatic dictation transfer

www.grundig-gbs.com

Infoline: +49 (0) 911-47 58-4

Your Grundig Business Systems Partner:




Comes with adjustable slide switch resistance...



... and a stand.



Operating Controls

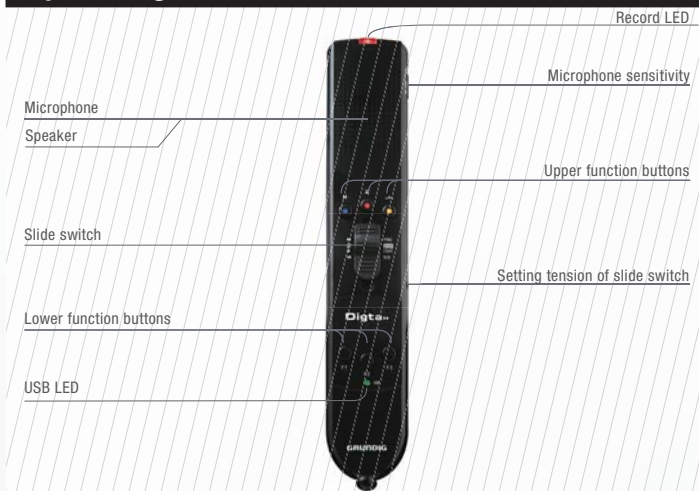

The Functions



FUNCTIONS

<i>CONNECTION TO PC</i>	USB connection
<i>SOUND CARD</i>	Built in sound card for ideal voice recording and reproduction
<i>4 FUNCTIONS SLIDE SWITCH</i>	Assignment: Fast forward, stop, start (record, playback), rewind. Alternatively: Record, stop, playback, rewind. Extra wide design for easy one handed operation, the tension of the slide switch latch can be individually adjusted, microphone mute function during stop position prevents incorrect speech recognition during speech pauses
<i>FUNCTION BUTTONS</i>	3 upper function keys - info/index, record, insert Alternatively preassigned with info/index, fast forward, insert 3 lower function keys - free configurable keys
<i>MICROPHONE SENSITIVITY</i>	Switch with 3 sensitivity levels (lateral)
<i>DISPLAY LED</i>	Recording: red, insert: orange, info: blue, USB active: green
<i>FILE FORMAT</i>	Application dependent (e.g. digital speech standard DSS or DSSPro)

<i>SPEAKER</i>	Dynamic loudspeaker, diameter 1.1 inch (28 mm), power output 200 mW
<i>POWER CONSUMPTION</i>	Stop/Record 80 mA Playback max. 250 mA
<i>SAMPLING RATES</i>	11,025 - 12 - 16 - 22,05 - 44,1 kHz, 16 Bit mono
<i>DATA RATE</i>	Approx. 13.6 kbit/s with DSS formatted data
<i>HOUSING</i>	Soft Touch Composite
<i>COLOUR</i>	Sonic Black
<i>STORAGE TEMPERATURE</i>	-20°C to +70°C
<i>OPERATING TEMPERATURE</i>	-5°C to +35°C
<i>DIMENSIONS</i>	Length approx. 8.46 inch (215 mm), width approx. 8.46 inch (38 mm), thickness approx. 0.71 inch (18 mm)
<i>WEIGHT WITHOUT CABLE</i>	Microphone approx. 105 g
<i>SYSTEM REQUIREMENTS</i>	Windows XP, Vista, WIN 7 / 8, USB interface, AdapterServer from version 4.2.3

TECHNICAL DATA

<i>LED INDICATOR</i>	three-colour (type of recording), monochrome (USB)
<i>PC INTERFACE</i>	USB 2.0 interface, USB audio device USB keyboard connector cable USB A plug
<i>BUILT IN SOUND CARD</i>	USB audio device
<i>FREQUENCY RESPONSE</i>	200 Hz- 12.500 Hz

SCOPE OF DELIVERY

Digta SonicMic II Classic
Microphone stand
Screwdriver to adjust tension of slide switch
Software for configuration of buttons and functions
DSSMover and AdapterServerConfig
Available with dictation software or speech recognition software. Please consult your Grundig Business Systems partner.

OPTIONAL ACCESSORIES

<i>TRANSCRIPTION SOLUTION</i>	e.g. Digta Soundbox 830 with foot pedal and head phones
-------------------------------	---

The performance features described by Grundig only apply to genuine Grundig accessories. The use of non-Grundig Business Systems accessories or those which are not recommended and approved by Grundig Business Systems automatically void any warranty claims towards Grundig Business Systems.

Grundig Business Systems GmbH Emmericher Straße 17, D-90411 Nuremberg
E-Mail: info@grundig-gbs.com, Internet: www.grundig-gbs.com. Printed in Germany.
Alterations and availability are subject to change without prior notice.
Order-number: HNE 6047 12/2012